


ELLEGELLE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE

ASF 1000 2X — 1350 2X — 1700 2X

Automatic spray washer, with double tank for washing and rinsing, with cantilever removable table.

Steady table with adjustable nozzles in position for a dedicated washing in the points of greatest need



Ellegelle machinery srl

Via G. Falcone, 41 - 21040 Gerenzano (VA)

Tel. 02 96489596 - 02 9682124

info@ellegellemachinery.com - www.ellegellemachinery.com



ellegelle.machinery



ELLEGELLE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE


ASF 1000 2X — 1350 2X — 1700-2X

Double tank machine, washing and rinsing, with a stainless steel tubular supporting structure, equipped with a sturdy full-extension cantilevered basket mounted on stainless steel guides to facilitate loading and unloading operations. The stationary basket stays in position during the whole washing phase and can be equipped with nozzles suitable for washing the parts in order to guarantee a complete cleaning of the object even in the holes, cavities, undercuts.

The basket extraction takes place above the opening hatch which also assumes the function of collecting drops. Washing takes place through a series of sprayers arranged in a ring over the entire chamber, above and below the loading surface. The washing solution, composed of water and detergent, is collected in the loading tank and reused until its complete exhaustion. The rinsing phase takes place with separate pump, separate spray circuit and water return in a separate tank via a motorized exchange system. The temperature reaches 80°C with minimum energy expenditure thanks to the complete insulation paneling, and it is a guarantee of an excellent result even with dry grease with considerable resistance. This temperature facilitates a quick drying of the piece. The machine is equipped with a chimney and an electro-fan for steam suction

Optional :

- Oil skimmer
- Dry with hot air oven
- Ultrafiltre from 100 to 5 micron
- Emptying diaphragm pump
- Automatic water / detergent load

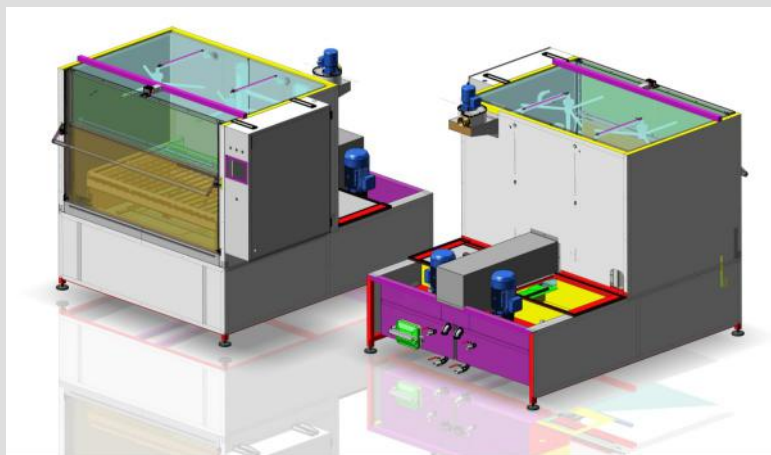

TECHNICAL DATA	ASF 1000-2X	ASF 1350-2X	ASF 1700 2X
Dimensions :	1750 x 2000h 2100	2140 x 2450 h 2050	2650x 2450 h 2050
Useful basket dim. :	1000 x 860 h 730	1360 x 860 h 730	1720x 860 h 730
Cantilever :	300 kg	350 kg	400 kg
Washing pump :	3 Kw, 250 l/min	4 Kw, 300 l/min	4 Kw 350 l/min
Pressure :	4 bar	4 bar	3,5 bar
Rinsing pump :	3 Kw 250 l/min	4 Kw 300 l/min	4Kw 350 l(min
pressure :	4 bar	4 bar	4 bar
Tank :	250 + 250 l	350 +350 l	500 + 500 l
Heat :	24 Kw tot	32 Kw tot	48 Kw tot T
Temperature :	adjustable 0÷80°C	adjustable 0÷80°C	adjustable 0÷80°C
Alarm :	Low level/ filter clogged	Low level/ filter clogged	Low level/ filter clogged

(The technical data are not binding. Ellegelle reserves the right to make all variations and modifications, without prior notice, to the products and information contained in this catalog)

Ellegelle machinery srl

Via G. Falcone, 41 - 21040 Gerenzano (VA)

Tel. 02 96489596 - 02 9682124

info@ellegellemachinery.com - www.ellegellemachinery.com



ellegelle.machinery

