




ELLEGELLE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE

ASF 2000 - 2X — 2500- 2X

Automatic spray washer, double tank for washing and rinsing with on stand removable table. Steady table with adjustable nozzles in position for a fast washing in the points of greatest need

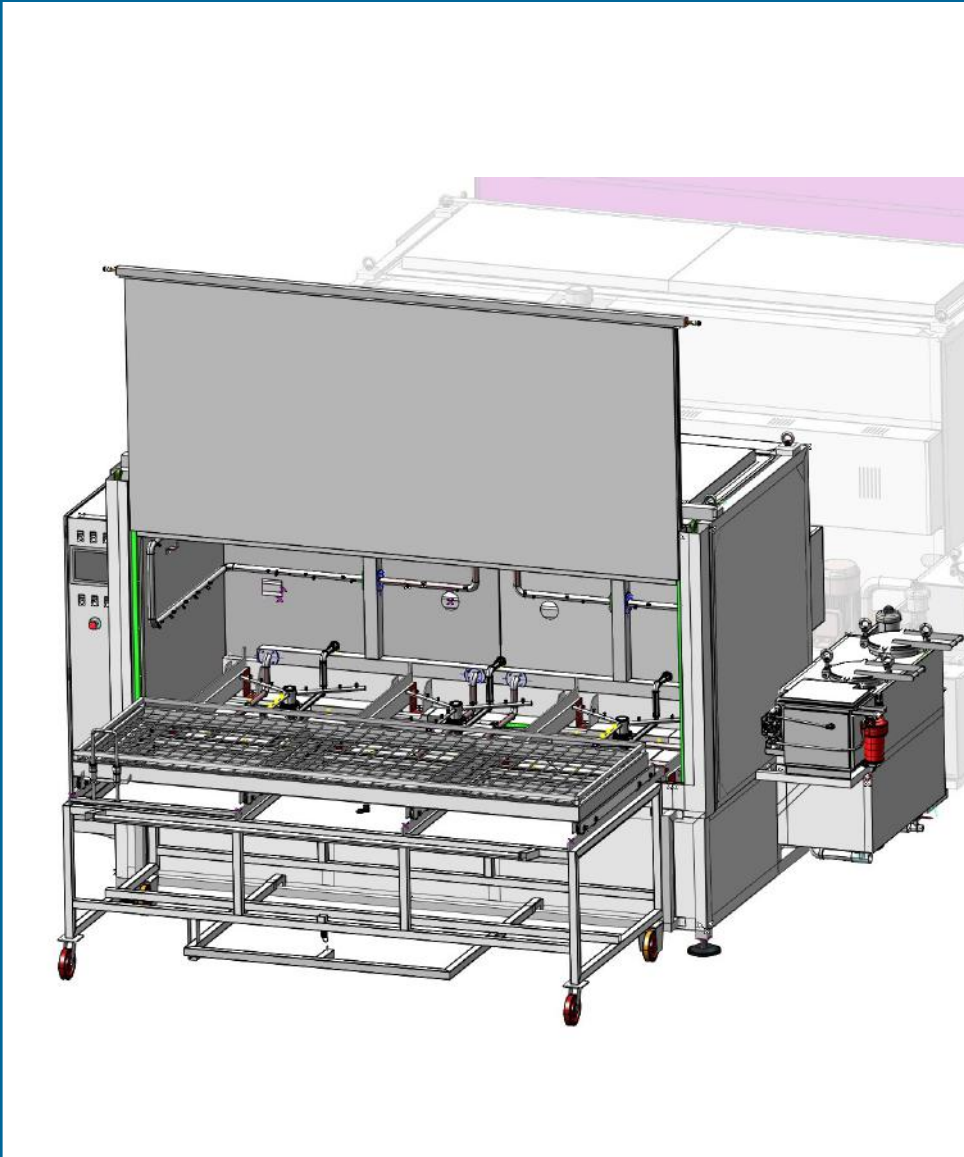

Ellegelle machinery srl

Via G. Falcone, 41 - 21040 Gerenzano (VA)

Tel. 02 96489596 - 02 9682124

info@ellegellemachinery.com - www.ellegellemachinery.com



ellegelle.machinery



ELLEGELLE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE


ASF 2000 - 2X — ASF 2500 2X

Industrial double tank washer, both for washing and rinsing, with stainless steel tubular frame, equipped with a sturdy full-extension basket on an external stand to facilitate loading and unloading operations using a winch or bridge crane. The basket, held in position during the whole washing phase, can be equipped with nozzles suitable for the washing of the item in order to guarantee a complete cleaning of the object even in the holes, cavities or undercuts

The washing takes place through a series of sprinklers arranged in a ring on the entire chamber, both above and below the loading surface. The solution composed of water and detergent is then collected and reused until it is completely depleted. The rinsing phase takes place with a separate pump, separate spray circuit and return water in a separate tank using a motorized exchange system. The temperature reaches 80°C, both for washing and rinsing, with minimum energy consumption thanks to the complete insulation paneling and it is a guarantee of an excellent result even with dry grease with considerable resistance. This temperature also facilitates rapid drying of the piece. The stainless steel basket filters are positioned externally for easy cleaning and maintenance. Machine complete with electric fan and condensate chamber for steam extraction. Tailgate opening with pneumatic pistons and bi-manual push-button panel

Options :

- Coalescence oil separator
- Hot air oven drying
- Ultrafilter from 100 up to 5 microns
- Diaphragm pump for emptying
- Automatic water/detergent loading

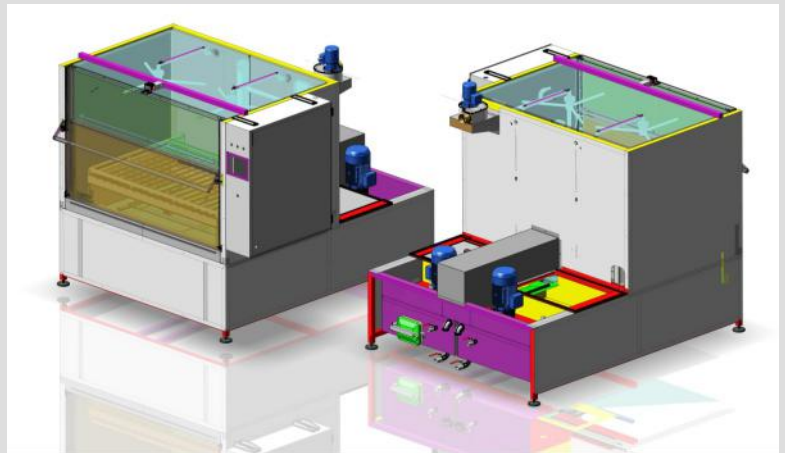

TECHNICAL DATA

ASF 2000-2X

ASF 2500-2X

Dimensions :	3000x 2450h 2150	3300x 2450 h 2150
Useful basket dim. :	2000 x 860 h 700	2500 x 860 h 700
Cantilever :	450 kg	500 kg
Washing pump :	4 Kw, 350l/min	5,5 Kw, 380 l/min
Pressure :	4 bar	4 bar
Rinsing pump :	4 Kw	5,5 Kw
Pressure:	4 bar 350 l/min	3,5 bar 400 l/min
Tank :	600 + 500 l	700 +700 l
Heat :	54 Kw tot	72 Kw tot
Temperature :	adjustable 0+80°C	adjustable 0+80°C
Alarm :	Low level/ filter clogged	Low level/ filter clogged

(The technical data are not binding. Ellegelle reserves the right to make all variations and modifications, without prior notice, to the products and information contained in this catalog)

Ellegelle machinery srl

Via G. Falcone, 41 - 21040 Gerenzano (VA)

Tel. 02 96489596 - 02 9682124

info@ellegellemachinery.com - www.ellegellemachinery.com

 ellegelle.machinery

