

ELLEGELLE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE

MRO- 200-2X MRO 400 2X

Automatic washer with rotating drum on the horizontal axis. Immersion wash and rinse with flux. Suitable for mechanical parts, degreasing, chip removal, drying.



Ellegelle machinery srl

Via G. Falcone, 41 - 21040 Gerenzano (VA)

Tel. 02 96489596 - 02 9682124

info@ellegellemachinery.com - www.ellegellemachinery.com

 ellegelle.machinery



ELLEGELLE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE

MRO- 200-2X MRO 400 2X

Industrial washer with rotating drum for washing, rinsing (passivation) of complex shape and geometry, dirty with oil, grease, polishing pastes, machining shavings small metal parts (brass, steel, aluminum). The machine is entirely made of stainless steel.


Programmable wash cycle:

- **spray phase** fed by a vertical pump, maximum temperature 80°C
- immersion **washing phase** in the same solution with a continuous flow of water that allows the washing of internal parts, blind holes, small parts with complex geometry.
- immersion **rinse phase** with flushing pump and separate water recovery tank
- **Drying / dripping phase** with compressed air blade
- **Drying phase** with hot air oven (optional)
- **Steam suction phase**

The machine is equipped with external basket filters so as to facilitate maintenance and cleaning operations. The loading operations take place in front of the machine through the opening and tilt of a stainless steel door and the insertion of 2 baskets simultaneously.

Optional:

- Coalescence oil separator
- Reduction baskets for small parts
- Hot air oven drying
- Ultrafilter from 100 up to 5 microns
- Diaphragm pump for tank emptying
- Automatic water / detergent load

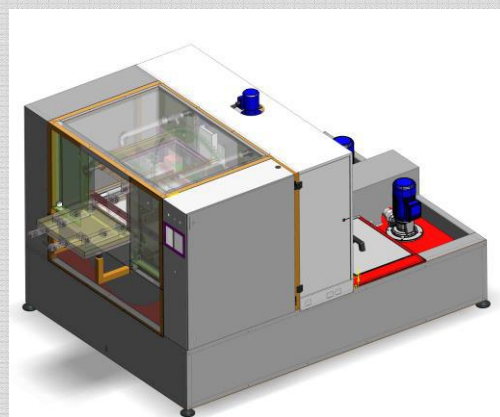

TECHNICAL DATA:

	MRO200 2x	MRO400 2x
Dimensions :	L 1650 X 2670 h 1750	L2150 x 3150 h 180 mm
2 baskets :	450x300 h 180	450x380 h 300
Washing tank :	360 l	480 l
Washing heats :	12 Kw	16 Kw
Washing pump :	2,2 Kw vertical	2,2 Kw, vertical
Rinsing tank :	360 l	480 l
Heat :	12 Kw	16 Kw
Rinsing pump :	2,2 kw vertical	2,2 Kw vertical
Temperature wash/rins. :	réglable 0÷80°C	réglable 0÷80°C
Motorized rotation :	0,18 Kw ajustable 1,5 - 3 r/min.	0,18 Kw, ajustable 1,5 - 3 r/min
Alarm :	Low level/ filter clogged	Low level/ filter clogged

(The technical data are not binding. Ellegelle reserves the right to make all variations and modifications, without prior notice, to the products and information contained in this catalog)

Ellegelle machinery srl

Via G. Falcone, 41 - 21040 Gerenzano (VA)
Tel. 02 96489596 - 02 9682124

info@ellegellemachinery.com - www.ellegellemachinery.com

 ellegelle.machinery

