

# ELLEGELLE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE

GE 1800 - GE 2000

Single-stage automatic spray washer, with removable rotary table on external stand, pneumatic pistons opening. Suitable for very heavy and bulky parts.



**Ellegelle machinery srl**

Via G. Falcone, 41 - 21040 Gerenzano (VA)

Tel. 02 96489596 - 02 9682124

info@ellegellemachinery.com - www.ellegellemachinery.com



ellegelle.machinery





# ELLEGELLE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE


GE 1800 - GE 2000

**Single-stage industrial and automatic spray washer, with motorized rotating basket, entirely made of stainless steel with tubular bearing structure**

Washing is carried out with a solution of water and detergent by crossing two spray ramps. Each ramp consists of lower, lateral and upper piping and is powered by a vertical pump with a liner, shaft, diffuser and impeller in aisi 304/316 stainless steel, maintenance-free pump. The washing temperature reaches 80°C with minimum energy expenditure thanks to the complete insulation paneling and it is a guarantee of an excellent result in washing even dry grease with considerable resistance. This temperature also facilitates rapid drying of the piece. The solution is collected in the tank and reused until it is completely exhausted. The machine is equipped with an external basket filter so as to facilitate maintenance operations. The loading operations take place in front of the machine by opening the door with pneumatic pistons and bi-manual push-button panel.

## Optional

- Manual basket extraction on external trolley
- Automatic basket extraction
- Drying oven
- Diaphragm emptying pump
- Coalescence oil separator
- Ultrafiltration from 100 up to 5 microns
- Automatic water / detergent load

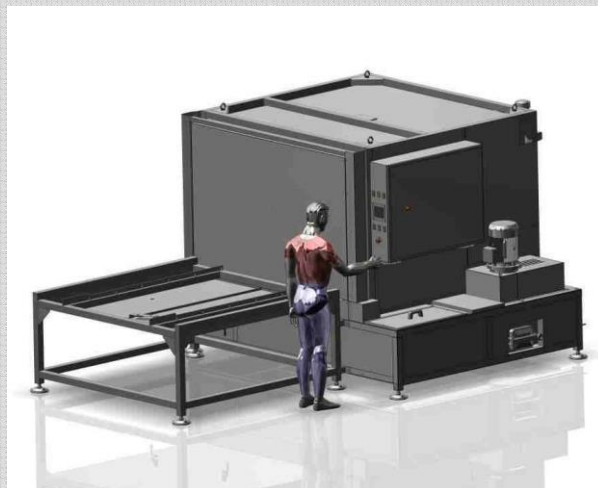

## TECHNICAL DATA

	GE 1800	GE 2000
Dimensions :	L2880 x P2250h 2100	L3100x P2450 h 2100
Washing basket :	Diameter 1800 mm H utile 920 mm	Diameter 2000mm H utile 900mm
Charge maximum	1800 kg	2000 kg
Washing pump :	7,5Kw, 500 l/min	7,5Kw, 550 l/min
Pressure :	4 bar	3,5 bar
Tank :	900 l	900 l
Heat :	36 Kw	36 Kw
Temperature :	adjustable 0÷80°C	adjustable 0÷80°C
Alarm :	Low level/ filter clogged	Low level/ filter clogged

The technical data are not binding. Ellegelle reserves the right to make all variations and modifications, without prior notice, to the products and information contained in this catalog

### Ellegelle machinery srl

Via G. Falcone, 41 - 21040 Gerenzano (VA)  
Tel. 02 96489596 - 02 9682124

[info@ellegellemachinery.com](mailto:info@ellegellemachinery.com) - [www.ellegellemachinery.com](http://www.ellegellemachinery.com)

 [ellegelle.machinery](http://ellegelle.machinery)

