


ELLEGELLE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE

CRJ 900-1200

Combined spray washer for automatic and manual washing.

Automatic washing with rotating basket for heavy and delicate parts, manual washing with high pressure lance, pedal basket rotation.



Ellegelle machinery srl

Via G. Falcone, 41 - 21040 Gerenzano (VA)

Tel. 02 96489596 - 02 9682124

info@ellegellemachinery.com - www.ellegellemachinery.com

 ellegelle.machinery



ELLEGELE Machinery

CONSTRUCTION AND SALE OF STAINLESS STEEL WASHING MACHINE

CRJ 900- 1200

Single-stage spray washer, automatic and manual combined, with motorized rotating basket, entirely made of stainless steel with bearing steel tubular structure.

Automatic washing: It takes place by crossing two spray ramps with a water and biodegradable detergent solution at a maximum temperature of 60°C. Each ramp consists of a lower, lateral and upper piping and is supplied with an immersed vertical pump equipped with aisi 304/316 stainless steel liner, shaft, diffuser and impeller and it is maintenance-free. The washing solution is then filtered and collected in the tank to be reused until it is completely exhausted. The machine is equipped with an external basket filter so as to facilitate maintenance and cleaning operations.

Loading operations take place in front of the machine by manually opening the flap of a stainless steel door; the opening is assisted by 2 gas springs.


Manual washing:

Equipped with auxiliary pump at 12 bar of pressure and spray lance with solid nylon handle, suitable for quick washing of small parts or single pieces. Very thick transparent PVC porthole with compressed air blade and internal LED illumination so as to guarantee perfect visibility of the objects during all the washing phases; rubber gloves; Robust spray gun for washing, suitable for heavy duty, equipped with solid nylon and heat resistant handle.

Manual rotation by foot control.

Optional :

- Ultrafilter from 50 to 5 microns
- Coalescence oil separator
- Emptying pump

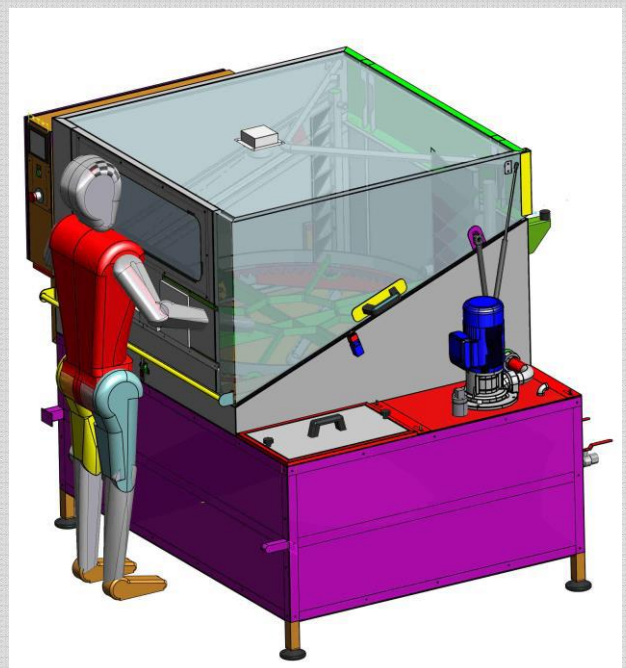

TECHNICAL DATA:

	CRJ 900	CRJ1200
Dimensions :	1550 x 1050 H 1900	1900x1500 h 1900
Washing chamber :	Diam. 900 h 500	Diam. 1200 h600
Useful load :	400 kg	550 kg
Automatic pump :	1,5 Kw, 120 l/min vertical	2,2 Kw 200 l/min vertical
Manual pupm :	2,2 Kw 20 l/min 12 bar	2,2 Kw 20 l/min 12 bar
Temperature :	réglable de 0 à 60°C	réglable de 0 à 60°C
Tank :	120 l	250 l
Heat :	2 heaters 4 Kw each	3 heaters 4 Kw each
Alarm :	Low level/ filter clogged	Low level/ filter clogged

The technical data are not binding. Ellegelle reserves the right to make all variations and modifications, without prior notice, to the products and information contained in this catalog

Ellegelle machinery srl

Via G. Falcone, 41 - 21040 Gerenzano (VA)
Tel. 02 96489596 - 02 9682124

info@ellegellemachinery.com - www.ellegellemachinery.com

 ellegelle.machinery

